

## Configuring a new profile for mobile broadband

Follow these steps to configure a new profile for mobile broadband. The data card must be inserted in the Tadpole M1400 for the mobile broadband menu to be displayed and hence the card to be configured.

Note1: On the Tadpole M1400 keyboard, the STOP key has been programmed to the Menu key, (⌂) which is to the right of the space bar.


Note2: The cursor must be located inside the OSD window to enable any of the menu items to be selected.

Note3: It is also possible to move the OSD window by dragging the window to a new position using the touchpad or an attached USB mouse

1. Turn on the Tadpole M1400

2. Press [Stop-M]

The following OSD menu will be displayed. To navigate the OSD menus use the [up/down/left/right arrow] to the appropriate menu. When highlighted, press [Enter] to select.

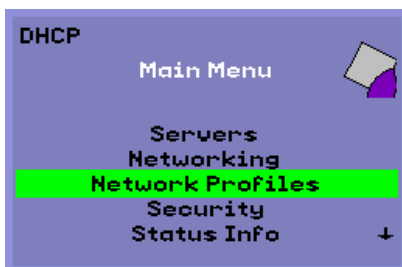

Select **Network Profiles** and press [Enter]




Select **New Profile** and press [Enter]



Enter a profile name of your choice and press [Enter]  
At the ok prompt press [Enter] to create



Select **Edit Profile** and [Enter]

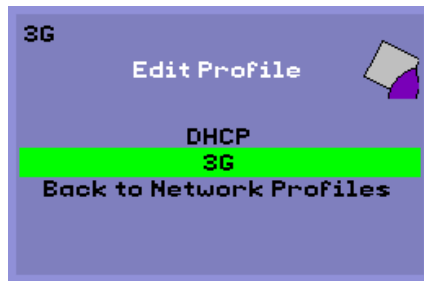

Select the profile you wish to edit and press [Enter]




Select **Networking** and press [Enter]




Select **Mobile Broadband** and press [Enter]



Select your region and press [Enter]

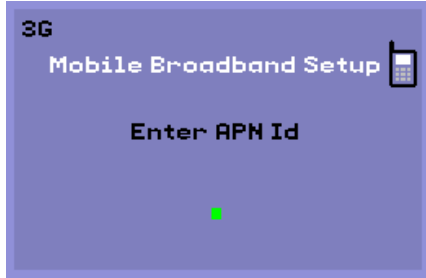

Enter your network provider's APN Id and press **[Enter]**

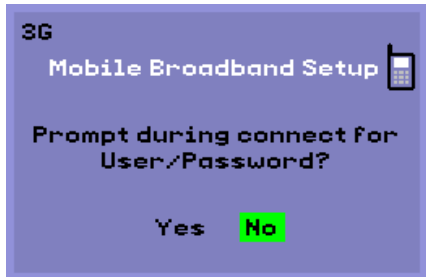


Should you require the configuration to prompt you for a user name and password when connecting select **[Yes]**

Else select **[No]** and you may enter it now or leave the entries blank



Enter your User Name (if applicable) or press **[Enter]** to continue

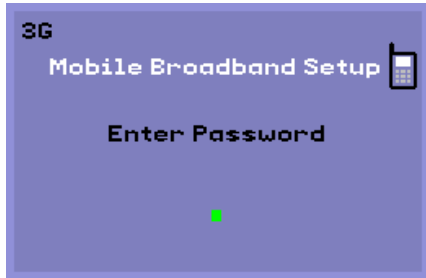

Enter your password (if applicable) or press **[Enter]** to continue



Enter MTU value if appropriate or press **[Enter]** to continue.

And press **[Enter]** to save changes and then press **[Enter]** again at the **ok** prompt to confirm configuration saved.

Press **[Esc]** or select **Back to Main** to return to the Main Menu.


Dependent on your configuration you may wish to configure a Server or the Security (VPN) for this particular profile. Select from the main menu the appropriate menu's entering the values associated with your particular network set up. Once you have completed the configuration active your new profile for use.



Select **Network Profiles** and press **[Enter]**




Select **Activate Profile** and press **[Enter]**

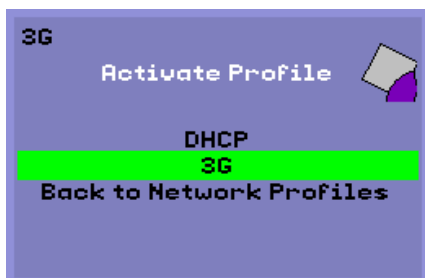

Select the network profile you wish to activate and press **[Enter]**

Press **[Enter]** at the ok to confirm selection.

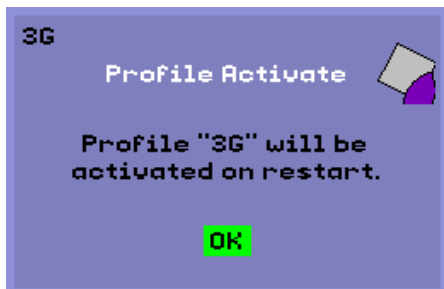

Press **[Enter]** at the ok to confirm selection

To restart the Tadpole M1400 client , press [Stop-A].